

全自動高速厚紙專用UV上光機 | 全自動高速UV厚薄兩用上光機


FULLY AUTOMATIC HIGH-SPEED UV VARNISHING MACHINE FOR THICK PAPER
FULLY AUTOMATIC HIGH-SPEED UV VARNISHING MACHINE FOR THICK AND THIN PAPER (WITH AIR KNIFE ATTACHMENT)

- YLT - 3 CONFIGURATION

 - FEEDER SYSTEM
 - DUST REMOVAL SYSTEM
 - PRIMER SYSTEM
 - INFRARED RAY SYSTEM
 - UV HEAD VARNISHING SYSTEM
 - UV CURING SYSTEM
 - STACKER SYSTEM
- YLT - 4 CONFIGURATION

 - FEEDER SYSTEM
 - DUST REMOVAL SYSTEM
 - WATER-BASED PRIMER SYSTEM
 - INFRARED RAY SYSTEM
 - PRIMER SYSTEM
 - UV HEAD VARNISHING SYSTEM
 - UV CURING SYSTEM
 - STACKER SYSTEM
- YLB - 3 CONFIGURATION


 - FEEDER SYSTEM
 - DUST REMOVAL SYSTEM
 - PRIMER SYSTEM
 - INFRARED RAY SYSTEM
 - AIR-KNIFE SYSTEM
 - UV CURING SYSTEM
 - STACKER SYSTEM

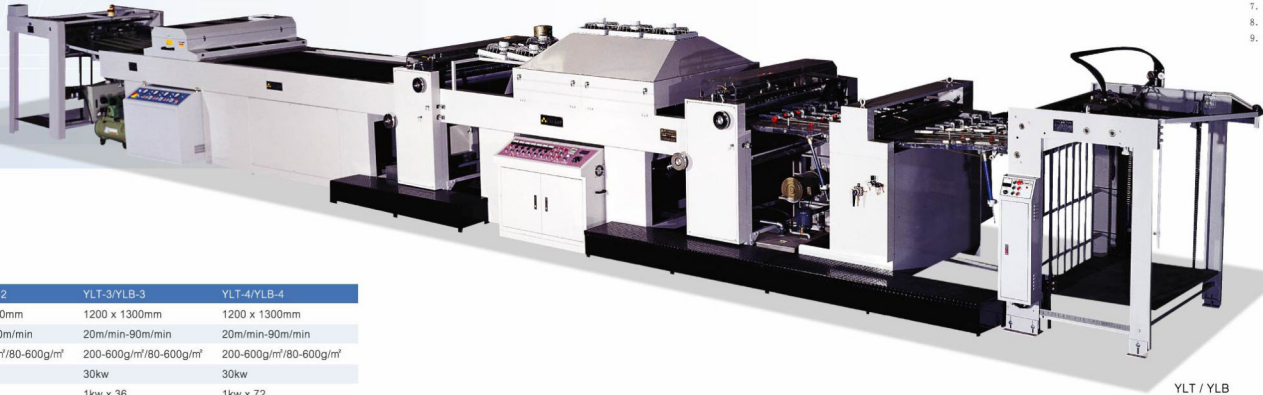

- 功能：
1. 全功能高速送紙、收紙採用單體機械紙台，節省疊紙時間，提高工作效率。
 2. 電子距離控制設計，操作簡易高速送紙一分鐘可高達50米。
 3. 新型高速可調式輸送道，保養清洗空間寬闊，方便。
 4. 送油機頭採用鏈條、皮帶傳動，運轉平穩安靜，毋需因膠輪大小而需更換齒輪之困擾。
 5. 單向調整不必因油料左右之厚薄而須調整。
 6. 精密單調式雙向油刀清洗簡易不傷油輪促使長期使用，永保紙面清潔。
 7. 新式精密風刀，風刀系統為可調式適用各種紙張，採用紅外線18秒鐘安全且效率高。
 8. 耐熱網皮帶吸氣輸送裝置使上光面紙張不受損傷，電子距離設計，UV燈座採氣壓式升降，保養容易，安全性高。
 9. 收紙採三面齊面，風壓迴路，低噪音，故障率低，紙張大小更換容易簡便，運轉中可隨意抽樣。

型號	Model	YLT-1/YLB-1	YLT-2/YLB-2	YLT-3/YLB-3	YLT-4/YLB-4
規格	Laminating Width	1200 x 1300mm	1200 x 1300mm	1200 x 1300mm	1200 x 1300mm
速度	Laminating Speed	20m/min-90m/min	20m/min-90m/min	20m/min-90m/min	20m/min-90m/min
適用紙張	Paper Size	200-600g/m ² /80-600g/m ²	200-600g/m ² /80-600g/m ²	200-600g/m ² /80-600g/m ²	200-600g/m ² /80-600g/m ²
UV燈3支	UV Lamp 3 Pieces	30kw	30kw	30kw	30kw
電熱	Electric Heater	1kw x 36	1kw x 36	1kw x 36	1kw x 72
動力	Power Required	8HP	10.5HP	12.5HP	22.5HP
機械總機	Machine Dimension (L x W x H)	11900 x 2800 x 2320mm	16000 x 2800 x 2320mm	17650 x 2800 x 2320mm	24150 x 2800 x 2320mm
重量	Total Weight (Approx)	4800/5800kg	7200/8200kg	8000/9000kg	11000/12000kg

本目錄僅供參考，特殊形式製品另行設計。
The catalogue is for reference only, special designed products are optional



YLT / YLB